


IMPACT WRENCHES

AL-2251

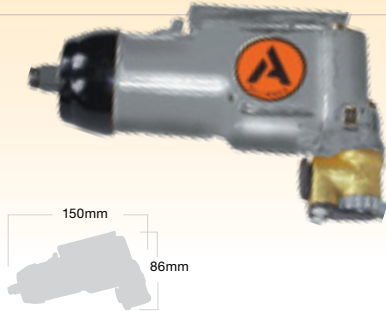

3/8" BUTTERFLY IMPACT WRENCH

BOLT CAPACITY	10mm
MAX TORQUE	102Nm 75ft lbs
AV. AIR CONS	170L/min 6cfm
AIR INLET	1/4" NPT
AIR HOSE REQD	3/8" ID
NET WEIGHT	1.75kg
WIDTH	42mm

Butterfly throttle type wrench, with instant reverse, for single handed work on small fasteners in auto repair shops on body panels, ignitions, carburetors, struts etc. as well as small engine and light industrial work.

AL-2350




1/2" SQ. DR. IMPACT WRENCH PIN CLUTCH / RUBBER HAND GRIP

BOLT CAPACITY	16mm
MAX TORQUE	380Nm 280ft lbs
AV. AIR CONS	108L/min 3.8cfm
AIR INLET	1/4" NPT
AIR HOSE REQD	3/8" ID
NET WEIGHT	2.6kg
WIDTH	52mm

Light duty impact wrench for bench work assembly and repair on items such as engines, transmissions, lawnmower base plates, engine pumps, air compressors, electric motors, etc. Pin clutch for smoother operation.

AL-2359

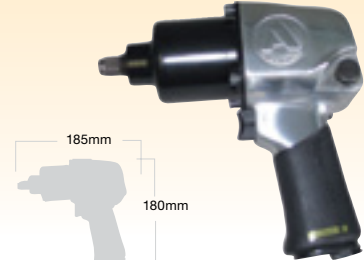


SUPER DUTY 1/2" SQ. DR. IMPACT WRENCH

TWIN HAMMER / HANDLE EXHAUST

BOLT CAPACITY	16mm
MAX TORQUE	542Nm 400ft lbs
ULTIMATE UNDO TORQUE	677Nm 500ft lbs
AV. AIR CONS	113L/min 4cfm
AIR INLET	1/4" NPT
AIR HOSE REQD	3/8" ID
NET WEIGHT	2.80kg
WIDTH	64mm

Heavy duty 1/2" impact wrench for automotive, industrial and farm use. Twin hammer clutch gives greater impact than pin clutch.

AL-2359-2

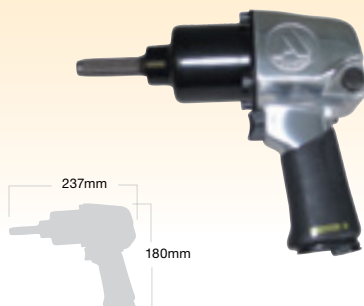


SUPER DUTY 2" EXTENDED 1/2" IMPACT WRENCH

TWIN HAMMER CLUTCH / HANDLE EXHAUST

BOLT CAPACITY	16mm
MAX TORQUE	542Nm 400ft lbs
ULTIMATE UNDO TORQUE	677Nm 500ft lbs
AV. AIR CONS	113L/min 4cfm
AIR INLET	1/4" NPT
AIR HOSE REQD	3/8" ID
NET WEIGHT	2.96kg
WIDTH	64mm

Same as AL-2359 but with 2" extended anvil for easier access into recessed wheels and other applications in confined spaces.

AL-2423

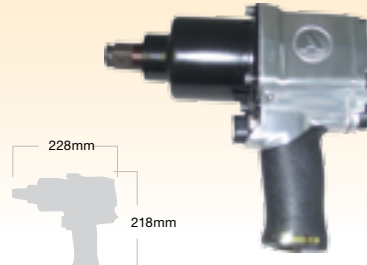


SUPER DUTY 3/4" SQ. DR. IMPACT WRENCH

TWIN HAMMER CLUTCH / HANDLE EXHAUST

BOLT CAPACITY	25mm
MAX TORQUE	1016Nm 750ft lbs
ULTIMATE UNDO TORQUE	1288Nm 950ft lbs
AV. AIR CONS	198L/min 7cfm
AIR INLET	1/4" NPT
AIR HOSE REQD	1/2" ID
NET WEIGHT	4.55kg
WIDTH	76mm

A heavy duty 3/4" impact wrench for operation in many construction, industrial, automotive and farm applications. Uses include pipeline construction, heavy vehicle tyres and service, steel and concrete erection, heavy machinery maintenance and repair.

AL-2423-6

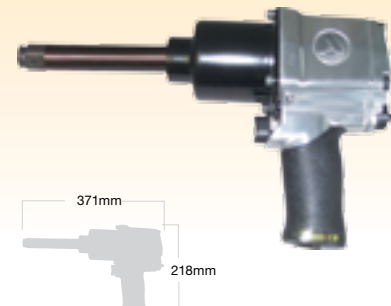

SUPER DUTY 6" EXTENDED ANVIL 3/4" IMPACT WRENCH

TWIN HAMMER CLUTCH / HANDLE EXHAUST

BOLT CAPACITY	25mm
MAX TORQUE	1016Nm 750ft lbs
ULTIMATE UNDO TORQUE	1288Nm 950ft lbs
AV. AIR CONS	198L/min 7cfm
AIR INLET	1/4" NPT
AIR HOSE REQD	1/2" ID
NET WEIGHT	4.99kg
WIDTH	76mm

Same as AL-2423 but with 6" extended anvil for easier access into recessed wheels and other applications in confined spaces.