

SAWS

PS-521



PANEL CUTTING SAW

MAX. DEPTH OF CUT	6mm
FREE SPEED	2200rpm
AIR CONS	114L/Min 4cfm
AIR INLET SIZE	¼"NPT
NET WEIGHT	2.27kg

Cuts plastic and rigid materials up to 6mm thick; aluminium up to 3mm thick; cold rolled mild steel to 1.2mm. Uses either 32mm dia. or 38mm dia. high speed steel blades. Is ideal for cutting sheet metal gutters, aluminium siding, auto body panels and signs. The blade leaves a milled, ready to fabricate finish without burring the metal.

PS-523




VARIABLE SPEED SAW

MAX. DEPTH OF CUT	16mm
FREE SPEED	2200rpm
AIR CONS	114L/Min 4cfm
AIR INLET SIZE	¼"NPT
NET WEIGHT	2.73kg

Variable speed trigger and large blade enables smooth, easy starting cuts in mild steel up to 1.6mm. Using 50mm or 63mm high speed steel blades this highly manoeuvrable saw cuts through 16mm thick timber or composite panels without chipping or burring the edges.

PS-526

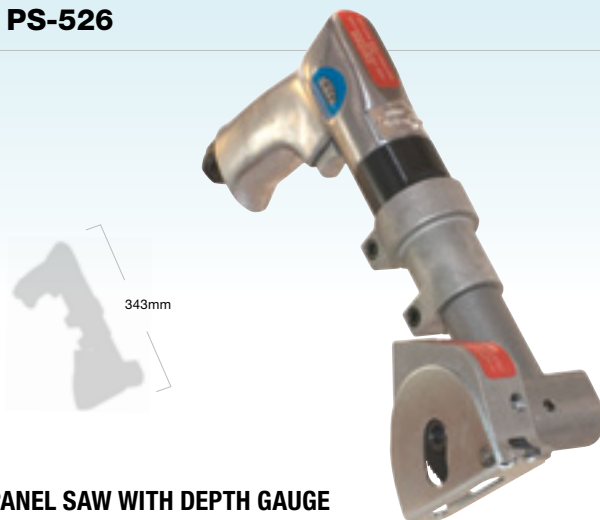

PANEL SAW WITH DEPTH GAUGE

MAX. DEPTH OF CUT	10mm
FREE SPEED	2200rpm
AIR CONS	114L/Min 4cfm
AIR INLET SIZE	¼"NPT
NET WEIGHT	2.27kg

Equipped with a precision screw-type depth adjustment, making it easy to maintain an exact depth of cut. Uses 38mm & 50mm high speed steel blades. Cuts mild steel up to 1.6mm, aluminium to 3mm, plastics to full cutting depth of 6mm for 32mm blade and 10mm for 50mm blade. Light in weight and portable, the PS-526 is ideal for auto body shops, model & design departments and sheet metal shops.

PSV-532



PANEL SAW WITH VACUUM HEAD

MAX. DEPTH OF CUT	16mm
FREE SPEED	2200rpm
AIR CONS	114L/Min 4cfm
AIR INLET SIZE	¼"NPT
NET WEIGHT	2.73kg

A lightweight, efficient saw for cutting dust-producing materials. The vacuum head accepts many standard cuffs from portable or in-plant vacuum systems. Comes equipped with a 63mm carbide abrasive blade but also accepts 50mm & 63mm high-speed steel blades for cutting sheet metal or metal laminated panels.

SAWS

PSV-534



PANEL SAW WITH VACUUM HEAD

MAX. DEPTH OF CUT	27mm
FREE SPEED	2200rpm
AIR CONS	114L/Min 4cfm
AIR INLET SIZE	¼"NPT
NET WEIGHT	2.73kg

Lightweight compact saw for cutting hardboard, plywood, dry-wall, backerboard, fibreglass and dust producing panels. Makes plunge cuts or straight cuts up to 27mm deep. Cutting zone is protected by a spring-loaded blade guard. Uses Kett 89mm saw blades or 63mm dia. high-speed steel blades for cutting up to 1.6mm cold rolled mild steel or metal laminated panels. Vacuum head accepts cuffs from most portable and in-plant vacuum systems.

P-544



TIMBER PANEL SAW

MAX. DEPTH OF CUT	27mm
FREE SPEED	2200rpm
AIR CONS	114L/Min 4cfm
AIR INLET SIZE	¼"NPT
NET WEIGHT	2.27kg

Cuts drywall, plywood, laminate hardboard and other soft or rigid materials up to 27mm thick. Features a cast aluminium saw head with Kett 89mm dia. hardened high-speed steel blade with a spring loaded retractable blade guard. This controlled depth-of-cut also makes it suitable for cutting signs, PVC, acrylic plastics and cold rolled mild steel up to 1.6mm thick. Compact size allows work in confined spaces with less hand or arm fatigue.