

SANDERS - STRAIGHT

400GH3MKSRT5/8;5500




HORIZONTAL SANDER

STEEL BODY / REAR EXHAUST /
SAFETY LEVER THROTTLE

POWER	900W 1.2HP
FREE SPEED	5500rpm
OUTPUT SHAFT	5/8"-11
MAX. AIR CONS	990L/min 35cfm
AIR INLET SIZE	3/8"NPT
AIR HOSE REQD	1/2"
NET WEIGHT	2.4kg

Used with inflatable or expanding wheels which take sanding or surface conditioning bands for use on metal or timber surfaces. Other speeds available. Inflatable drum or expanding wheels not included.

500H1MKT5/8;4000

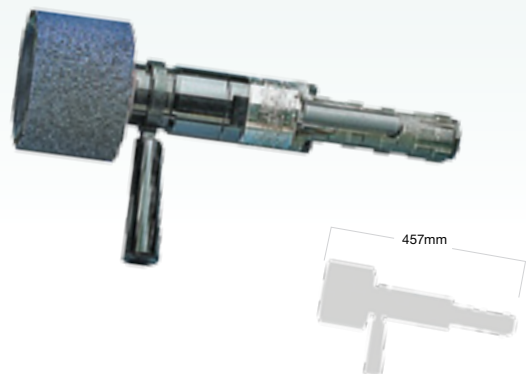

HORIZONTAL SANDER

SIDE EXHAUST / SAFETY LEVER THROTTLE

POWER	1500W 1.5HP
FREE SPEED	4000rpm
OUTPUT SHAFT	5/8"-11
MAX. AIR CONS	990L/min 35cfm
AIR INLET SIZE	1/2"NPT
AIR HOSE REQD	13mm 1/2"
NET WEIGHT	2.9kg

Same as the previous model but with a more powerful motor and slower speed for more aggressive sanding and surface conditioning. Inflatable drum or expanding wheel not included.

SANDERS - ANGLE

4620RA3MKSR;4000;7SP




180MM RIGHT ANGLE SANDER

REAR EXHAUST / SAFETY LEVER THROTTLE / STEEL BODY/
MULTIPLE POSITION SIDE HANDLE

POWER	900W 1.2HP
FREE SPEED	4000rpm
OUTPUT SHAFT	5/8"-11
MAX. AIR CONS	990L/min 35cfm
AIR INLET SIZE	3/8"NPT
AIR HOSE REQD	13mm 1/2"
NET WEIGHT	3.1kg

Lighter tool for descaling and paint removal from metal surfaces where a right-angle head is preferred.



520RA2XKTKW;6000;9SP



230MM RIGHT ANGLE SANDER

SAFETY LEVER THROTTLE / 230MM SANDING PAD
ALSO AVAILABLE / MULTIPLE POSITION SIDE HANDLE

POWER	1500W 2.0HP
FREE SPEED	6000rpm
OUTPUT SHAFT	5/8"-11
MAX. AIR CONS	1134L/min 40cfm
AIR INLET SIZE	1/2"NPT
AIR HOSE REQD	13mm 1/2"
NET WEIGHT	3.6kg

Powerful tool for heavy sanding and descaling of metal surfaces. Can also be purchased with 180mm sanding pad & guard - order 520RA2XKTKW;8000;7SP

