


HAND HELD SCARIFIERS

HAND HELD SCARIFIERS

These versatile high production tools are ideal for the removal of coatings from both steel and concrete substrates. Quick change hubs with an assortment of abrasives enable you to remove everything from mastics and alkyds to epoxy coatings, rapidly and keeping dust to a minimum.

The Trelawny hand held scarifier, with star or beam cutters, can even remove coatings from some piping and curved surfaces. These tools are lightweight so they can be used vertically or overhead and are available in pneumatic and electric powered models, 2" or 4" wide and for use with a range of cutters or abrasives.

194.0205



HAND HELD SCARIFIER

PNEUMATIC / 50MM CUTTING WIDTH /
FOR USE WITH ABRASIVE FLAPS

| | |
|-----------------|----------------|
| WORKING WIDTH | 55mm |
| FREE SPEED | 2700rpm |
| POWER | 0.89kW 1.2HP |
| AIR CONSUMPTION | 840L/min 30cfm |
| AIR INLET SIZE | 1/4"BSP |
| WEIGHT | 4.3kg |

194.C205



HAND HELD SCARIFIER

PNEUMATIC / 50MM CUTTING WIDTH /
FOR USE WITH CUTTERS

| | |
|-----------------|----------------|
| WORKING WIDTH | 55mm |
| FREE SPEED | 2700rpm |
| POWER | 0.89kW 1.2HP |
| AIR CONSUMPTION | 840L/min 30cfm |
| AIR INLET SIZE | 1/4"BSP |
| WEIGHT | 5.8kg |

194.1220





HAND HELD SCARIFIER

240V ELECTRIC / 50MM CUTTING WIDTH /
FOR USE WITH ABRASIVE FLAPS

| | |
|-----------------|----------------|
| WORKING WIDTH | 60mm |
| FREE SPEED | 2000rpm |
| POWER | 1.2kW 1.6HP |
| WEIGHT | 4.6kg |
| AIR CONSUMPTION | 840L/min 30cfm |
| AIR INLET SIZE | 1/4"BSP |

194.0405

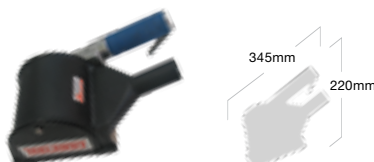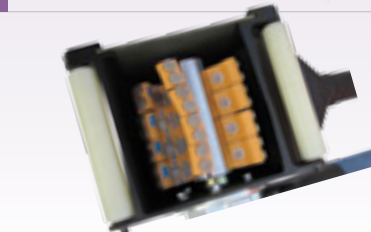


HAND HELD SCARIFIER

PNEUMATIC / 100MM CUTTING WIDTH /
FOR USE WITH ABRASIVE FLAPS

| | |
|-----------------|----------------|
| WORKING WIDTH | 110mm |
| FREE SPEED | 2700rpm |
| POWER | 0.89kW 1.2HP |
| AIR CONSUMPTION | 840L/min 30cfm |
| AIR INLET SIZE | 1/4"BSP |
| WEIGHT | 4.9kg |

194.C405

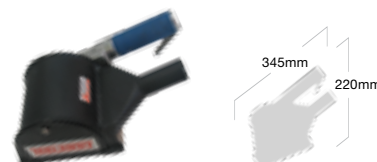

HAND HELD SCARIFIER

PNEUMATIC / 100MM CUTTING WIDTH /
FOR USE WITH CUTTERS

| | |
|-----------------|----------------|
| WORKING WIDTH | 110mm |
| FREE SPEED | 2700rpm |
| POWER | 0.89kW 1.2HP |
| AIR CONSUMPTION | 840L/min 30cfm |
| AIR INLET SIZE | 1/4"BSP |
| WEIGHT | 6.5kg |

HAND HELD SCARIFIERS

ACCESSORIES - HAND HELD SCARIFIERS

HEAVY SCALING

LIGHT BURNISHING







STAR CUTTER



BEAM CUTTER



C FLAP

| PRODUCT | PART NO. | DESCRIPTION | SPECIFIC APPLICATION |
|---|----------|-----------------------------------|--|
|  | 312.MRPC | C type flaps | Removal of light paint and rust from steel and concrete surfaces. 6 flaps for 2" machine. 12 flaps for 4" machine. |
|  | 312.S200 | Quality carbon steel star cutters | Aggressive removal of thick coatings and epoxy coatings include non slip. |
|  | 312.R200 | Quality carbon steel beam cutters | Removal of light rust and paint leaving a smooth surface with reduced stress lines. |
|  | 438.0205 | Hub with pins - 50mm | For use with C Type flaps. |
| | 438.0405 | Hub with pins - 100mm | |
|  | 438.0209 | Hub for cutters - 50mm | For use with star or beam cutters |
| | 438.0409 | Hub for cutters - 100mm | |